

FORM PTO-1390  
(REV. 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

0020-4834P

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/787303

INTERNATIONAL APPLICATION NO.

PCT/JP99/04832

INTERNATIONAL FILING DATE

September 7, 1999

PRIORITY DATE CLAIMED

September 18, 1998

TITLE OF INVENTION

POLYTETRAFLUROETHYLENE BLOCK-SHAPED MOLDED ARTICLE AND METHOD OF PRODUCING THE SAME

APPLICANT(S) FOR DO/EO/US

ISHIWARI, Kazuo; UCHIDA, Tatsuro; YAMADA, Masahiko

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39 (1).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau. WO 00/16968
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is transmitted herewith.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4)
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 20. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98-International Search Report (PCT/ISA/210)
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821-1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:
  - 1.) PCT Substitute Claims Letter w/ amended claims
  - 2.) Four (4) sheets of Formal Drawings

Form PTO-1390 (REV 11-2000) page 2 of 2

PATENT  
0020-4834P

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: ISHIWARI, Kazuo et al. Conf.:  
Int'l. Appl. No.: PCT/JP99/04832  
Appl. No.: New Group:  
Filed: March 16, 2001 Examiner:  
For: POLYTETRAFLUROETHYLENE BLOCK-SHAPED  
MOLDED ARTICLE AND METHOD OF  
PRODUCING THE SAME

PRELIMINARY AMENDMENT

**BOX PATENT APPLICATION**

Assistant Commissioner for Patents  
Washington, DC 20231

March 16, 2001

Sir:

The following Preliminary Amendments and Remarks are respectfully submitted in connection with the above-identified application.

AMENDMENTS

IN THE SPECIFICATION:

Please amend the specification as follows:

Before line 1, insert --This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/JP99/04832 which has an International filing date of September 7, 1999, which designated the United States of America and was published in English.

REMARKS

The specification has been amended to provide a cross-reference to the previously filed International Application.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By 

Andrew D. Meikle, #32,868

ADM/cqc  
0020-4834P

P.O. Box 747  
Falls Church, VA 22040-0747  
(703) 205-8000

(Rev. 02/12/01)

## DESCRIPTION

POLYTETRAFLUOROETHYLENE BLOCK-SHAPED MOLDED ARTICLE AND  
METHOD OF PRODUCING THE SAME

5

## Field of Invention

The present invention relates to a molded article made of polytetrafluoroethylene (hereinafter also referred to as "PTFE") and a method of producing the same. According to the present invention, a large PTFE molded article  
10 block having less distortion and small strain can be produced.

## Related Art

PTFE has a very high melt viscosity of at least about  $10^8$  poise at  $380^\circ\text{C}$  and, therefore, molding methods such as extrusion and injection used for general  
15 thermoplastic resins (having a melt viscosity of  $10^3$  to  $10^4$  poise on molding) can not be applied.

For this reason, as the molding method of PTFE, the following compression molding method is most popular and block-shaped molded articles can be molded by this method.

20 (a) A mold is filled uniformly with raw material powder, and the mold is compressed by using a press at a pressure of 100 to  $1,000\text{ kg/cm}^2$  and a normal temperature.

(b) The resultant comparatively brittle cylindrical preform is put into a furnace so that the rotation symmetry axis of the preform is in the gravitational  
25 direction; the baking temperature is raised to  $360$  to  $380^\circ\text{C}$ ; and the temperature is

maintained in a state in which the preform is not moved, until the baking of the preform is completed (longitudinal baking method).

(c) The furnace temperature is lowered to room temperature as such to give a block-shaped molded article.

5 However, in the case of processing the block-shaped molded article into a sheet or film, the loss of materials at the cutting time is large when the deformation amount of the block-shaped molded article (excluding the deformation in a height direction) generated at the baking time is large. This loss of materials is conspicuous with respect to the block-shaped molded articles having a low melt  
10 viscosity and a large height.

#### Summary of Invention

An object of the present invention is to produce a block-shaped molded article having little distortion.

15 The present invention provides a polytetrafluoroethylene block-shaped molded article having a melt viscosity and a block deformation amount contained within a polygonal region surrounded by a straight line A:  $x = 1.0 \times 10^9$  (melt viscosity of  $1.0 \times 10^9$  poise), a straight line B:  $x = 2.5 \times 10^{10}$  (melt viscosity of  $2.5 \times 10^{10}$  poise), a straight line C1:  $y = 7.0$  (block deformation amount of 7.0%), a  
20 straight line D1:  $y = 0$  (block deformation amount of 0%), and a straight line E1:  $y = -8.7 \log_{10}(x) + 91$  in a graph with an x-axis being a common logarithm of a melt viscosity (poise) at 380°C of the polytetrafluoroethylene block-shaped molded article and a y-axis being a block deformation amount (%) of the molded article.

Further, the present invention provides a method of producing a  
25 polytetrafluoroethylene block-shaped molded article, comprising inserting a

polytetrafluoroethylene preform into a pipe in a state in which a symmetry axis of the preform is horizontal; placing the pipe on two rolls spaced apart in a horizontal direction; and heating the preform to bake the preform while rotating the pipe and the preform by rotating at least one roll to transmit a rotation of the roll to the pipe,  
 5 whereby giving the polytetrafluoroethylene block-shaped molded article.

#### Brief Description of the Drawings

Fig. 1 is a perspective view showing a preform to be used in the present invention.

10 Fig. 2 is a perspective view showing a mode in which the preform is rotated.

Fig. 3 is a view showing a method of measuring a deformation degree, a roundness, and a bend.

Fig. 4 is a graph showing a block deformation amount (%) and a melt viscosity (poise) at 380°C to which the polytetrafluoroethylene molded article of the  
 15 present invention corresponds.

Fig. 5 is a graph showing straight lines that give preferable ranges of the present invention of the block deformation amount (%) and the melt viscosity (poise) at 380°C.


#### 20 Detailed Description of the Invention

The polytetrafluoroethylene powder is preferably powder obtained by a suspension polymerization, but may be powder obtained by other polymerization methods (e.g. an emulsion polymerization). The average particle diameter of the polytetrafluoroethylene powder may be from 10 to 1,000  $\mu\text{m}$ .

25 The polytetrafluoroethylene powder is a homopolymer of tetrafluoroethylene,

or a copolymer of tetrafluoroethylene and another fluoromonomer. In the copolymer, a molar ratio of tetrafluoroethylene to the fluoromonomer may be from 95:5 to 99.999:0.001. The copolymer may be a copolymer made of tetrafluoroethylene and perfluorovinylether (i.e. vinyl ether-modified polytetrafluoroethylene). Perfluorovinyl


5 ether may be a compound represented by the formula:



wherein  $R_f$  is an organic group, which essentially has a carbon atom and a fluorine atom, and has no hydrogen atom and optionally has an oxygen atom.


The  $R_f$  group in the perfluorovinylether (I) may be a perfluoroalkyl group

10 having 1 to 10 carbon atoms, a perfluoro(alkoxyalkyl) group having 4 to 9 carbon atoms, a group represented by the formula (II):

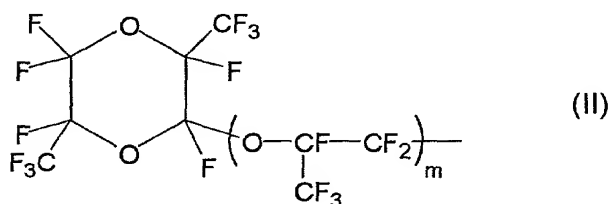

wherein  $m$  is a number of 0 to 4,

15 or a group represented by the formula (III):



wherein  $n$  is a number of 1 to 4.

The melt viscosity at 380°C of polytetrafluoroethylene is at most  $2.5 \times 10^{10}$

20 poise, for example, at most  $2.0 \times 10^{10}$  poise.



The polytetrafluoroethylene powder is compression-molded to give a preform. In the compression molding, the compression pressure may be generally from 100 to 1000 kg/cm<sup>2</sup>. The period of time for maintaining the compression may be generally from one minute to five hours.

5 The shape of the resultant preform is not particularly limited, but may be cylindrical. The cylindrical preform may have a hole for passing a rotation shaft at a symmetry axis (rotation symmetry axis) of the cylinder. In the cylindrical preform, the outer diameter (i.e. an outer diameter of the bottom surface perpendicular to the rotation symmetry axis of the cylinder) may be from 10 to 100  
10 cm, and the height of the cylinder (i.e. the length of the cylinder in the axis direction of the rotation symmetry axis) may be from 50 to 300 cm, particularly at least 80 cm.

In the present invention, the "height of the molded article" and the "height of the block" refer to the length of a cylindrical preform or a cylindrical baked block-shaped molded article in the axis direction of the rotation symmetry axis.

15 The resultant preform is baked while being rotated to give a block-shaped molded article.

In general, the column or cylinder is preferably rotated continuously about a symmetry axis of the column under the state where the column is located so that the symmetry axis of the column is in a horizontal direction. Alternatively, the column is  
20 rotated in the direction vertical to the symmetry axis from the state where the column is located so that the symmetry axis of the column is in a vertical direction to provide the state where the column is turned upside down, and then the column may be further rotated to return to the original orientation. In case of rotating the column in the direction vertical to the symmetry axis, the rotation may carry out continuously or  
25 intermittently (for example, the column is allowed to stand at the position that the

symmetry axis of the column is in a vertical direction for a fixed time (e.g. 1 to 60 minutes)). The rotation speed may be usually from 1 to 300 revolutions/h.

The load applied on the preform per unit area at the time of baking the preform is preferably at most  $100 \text{ g/cm}^2$ , for example at most  $50 \text{ g/cm}^2$ , particularly at most  $30 \text{ g/cm}^2$ . The load per unit area refers to the load applied on the preform per unit area at the time of baking the preform, and is defined by  $[(\text{weight (g) of the preform}) \div (\text{bottom surface area (cm}^2\text{) of the preform})]$  in a conventional baking method (longitudinal baking method). In the baking method of the present invention (rotational baking method), the load per unit area is defined by  $(\text{weight (g) of the preform}) \div (\text{surface area (cm}^2\text{) of the preform facing to the outside, excluding the two bottom surface areas})$ .

At the time of producing a polytetrafluoroethylene block-shaped molded article from the preform, particularly in the case where it is baked by the method of Fig. 2, the block height (i.e. L in Fig. 1) may increase. The increase of the block height may be at least 3%, for example at least 6%, particularly at least 8%.

In the baking, the preform is heated to the temperature which is higher by 10 to  $100^\circ\text{C}$ , e.g. by 15 to  $50^\circ\text{C}$  than the melting point of the preform. The heating time is usually from 1 to 500 hours. It is necessary to rotate the preform in the baking, and the rotation is preferably initiated before the temperature of the surface of the preform reaches the temperature which is lower by  $100^\circ\text{C}$  than the melting point of the preform, because the preform begins to deform when it is heated even at a temperature less than the melting point. The rotation is preferably discontinued after the crystallization has been completed by cooling the preform.

A shaft may be inserted through a hole of the preform. The shaft may be made of SUS (stainless steel) or Ni-plated metal (e.g. iron) and may be hollow or solid.

A polytetrafluoroethylene block-shaped molded article is obtained by carrying out the baking. The shape of the polytetrafluoroethylene block-shaped molded article after the baking, is approximately the same as the preform. The molded article expands in the compression direction at the time of preliminary molding, and shrinks in the direction (radial direction) perpendicular to the compression direction.

The present invention provides a polytetrafluoroethylene molded article wherein a loss in weight until a stable film or sheet can be cut (that is, a cut weight of the cut block until a sheet having a width equal to the block height can be obtained) (that is, a block deformation amount):

$$[(\text{weight of whole molded article}) - (\text{weight at minimum outer diameter})] \div (\text{weight of whole molded article}) \times 100$$

is not more than 0.7% by weight.

The molded article of the present invention has less deformation. The term "deformation" is used in a molded article whose diameter varies, a molded article whose roundness is not good or a molded article having a bend as shown in Fig. 3. The polytetrafluoroethylene molded article preferably has a roundness degree of not more than 5.0%, for example not more than 3.0%, particularly not more than 0.3%; a deformation degree of not more than 15%, for example not more than 5%, particularly not more than 1.0%; and a bend (based on the height of the molded article) of not more than 2.0%, for example not more than 1.0%, particularly not more than 0.1%.

$$\text{Roundness degree} = (\text{maximum outer diameter (D)} - \text{minimum outer diameter (C)}) \div (\text{minimum outer diameter}) \times 100,$$

$$\text{Deformation degree} = (\text{maximum outer diameter (B)} - \text{minimum outer diameter (A)}) \div (\text{minimum outer diameter}) \times 100,$$

Bend = (difference between a center position of the bottom face of the molded article and a center position of the top face of the molded article (E))  $\div$  (height of the molded article)  $\times$  100.

A film of polytetrafluoroethylene (thickness: e.g. 5  $\mu\text{m}$  to 1 cm, particularly 5  $\mu\text{m}$  to 1 mm) can be obtained by skiving the resulting baked molded article.

A film or sheet cut from the polytetrafluoroethylene molded article according to the present invention has less distortion (in particular curling). A length of film or sheet, which is obtained by cutting the cut film or sheet at 600 mm in the longitudinal direction (the direction of D in Fig. 1) (the longitudinal direction of sheet) and at a width of 50 mm in the height direction (the direction of L in Fig. 1) (the width direction of sheet), is preferably within  $\pm 5$  mm based on a length of 600 mm at any position of the molded article (that is, comparison among all cut films or sheets).

Even if a film or sheet cut from the molded article obtained by baking is subjected to a heat treatment, the resulting distortion is small (that is, it uniformly expand and shrink). With regard to distortion of a film or sheet obtained by cutting the cut film or sheet into a square having a length of 200 mm in both the longitudinal direction and the height direction, treating at 360°C for 2 hours, and then cooling at 25°C per hour, the difference between the maximum length and the minimum length is preferably at most 5 mm in both the longitudinal direction (the direction vertical to the rotation symmetry axis of the molded article) and the height direction (the direction parallel to the rotation symmetry axis of the molded article) at any position of the molded article (that is, comparison among all cut films or sheets).

The resulting polytetrafluoroethylene film or sheet can be used in heat-resistant electric wires, heat-resistant insulating tapes for vehicle motor and generator, anticorrosion linings for chemical plant, piping gasket, and the like.

The present invention will be described in detail with reference to the accompanying drawings.

Fig. 1 is a perspective view illustrating a preform of the present invention. The preform 10 has cylindrical or columnar shape and has a hole 12. The hole 12 is consistent with a symmetry axis of the column. The preform 10 is located so that its symmetry axis is in a horizontal direction. The preform 10 has a diameter (average diameter)  $D$  and a length (average length)  $L$  as shown in the drawing. Usually, the diameter  $D$  is from 20 to 150 cm, for example from 30 to 70 cm, and the length  $L$  is from 30 to 300 cm, for example from 60 to 150 cm. The hole diameter is smaller by, for example, from 5 to 100 cm than  $D$ . The preform 10 has approximately the same shape and size as those of a molded article after baking. The preform 10 has a symmetry axis (namely, center axis or rotation symmetry axis) 14, which is along the center of the hole 12. The preform 10 is rotated about the symmetry axis 14.

Fig. 2 is a cross-sectional view illustrating an embodiment wherein the preform is rotated. A metal pipe 34 (e.g. an SUS pipe) exists in the outer side of the preform 10. Two rolls 30 and 32 are rotated in the direction of the arrow. The rotation of the rolls 30 and 32 is transmitted to the pipe 34, thereby to rotate the preform 10. A hollow unfixed pipe 36 (particularly a metal pipe) is inserted through the hole of the preform 10, and the rotation of the preform 10 is transmitted to the pipe 36 to rotate the pipe 36. The pipe 36 may be omitted. According to this embodiment, the effect that the preform 10 contacts with the metal pipe 34 in a wider area can be obtained.

Fig. 3 is a diagram illustrating methods of measuring a deformation degree, a roundness degree and a bend (based on the height of the molded article) of the molded article.

Fig. 3 (a) and (b) are elevational views of the polytetrafluoroethylene molded

article illustrating a method of measuring the deformation degree. The deformation degree can be determined from the following equation:

$$\text{Deformation degree} = (\text{maximum outer diameter (B)} - \text{minimum outer diameter (A)}) \div (\text{minimum outer diameter (A)}) \times 100.$$

5 The deformation degree is preferably not more than 15%.

Fig. 3 (c) is a top view of the polytetrafluoroethylene molded article illustrating a method of measuring the roundness degree. The roundness degree can be determined from the following equation: (wherein the roundness degree was measured at a position having the largest difference between the maximum outer diameter (D) and the minimum outer diameter (C) on the concentric circles of the molded article.)

$$\text{Roundness degree} = (\text{maximum outer diameter (D)} - \text{minimum outer diameter (C)}) \div (\text{minimum outer diameter (C)}) \times 100$$

The roundness degree is preferably not more than 5.0%.

Fig. 3 (d) is a cross-sectional view, parallel to the extension direction of the hole, of the polytetrafluoroethylene molded article illustrating a method of measuring the bend in the height of the molded article. The bend can be determined from the following equation:

$$\text{Bend} = (\text{difference between a center position of the bottom of the molded article and a center position of the top face of the molded article (E)}) \div (\text{height of the molded article}) \times 100.$$

The bend (based on the height of the molded article) is preferably not more than 2.0%.

Fig. 4 is a graph showing the block deformation amount (%) and the melt viscosity (poise) at 380°C possessed by the polytetrafluoroethylene block-shaped molded article of the present invention. The range of the present invention is a

region surrounded by a straight line A:  $x = 1.0 \times 10^9$  (melt viscosity of  $1.0 \times 10^9$  poise), a straight line B:  $x = 2.5 \times 10^{10}$  (melt viscosity of  $2.5 \times 10^{10}$  poise), a straight line C1:  $y = 7.0$  (block deformation amount of 7.0%), a straight line D1:  $y = 0$  (block deformation amount of 0%), and a straight line E1:  $y = -8.7\text{Log}_{10}(x) + 91$ . The

5 straight line E1 is a straight line showing a state in which the block deformation amount is reduced by about 20% as compared with the prior art (i.e. Comparative Examples 1 to 3). Fig. 4 also shows the data obtained in Examples 1 to 3 and Comparative Examples 1 to 3.

Fig. 5 is a graph showing straight lines which give preferable regions of the

10 present invention of the block deformation amount and the melt viscosity at 380°C. C2 is a straight line with  $y = 6.0$ , and C3 is a straight line with  $y = 5.0$ . E2 is a straight line with  $y = -7.6\text{Log}_{10}(x) + 79$ , and E3 is a straight line with  $y = -$

6.5 $\text{Log}_{10}(x) + 68$ . The straight line E2 is a straight line showing a state in which the block deformation amount is reduced by about 30% as compared with Comparative

15 Examples 1 to 3. The straight line E3 is a straight line showing a state in which the block deformation amount is reduced by about 40% as compared with Comparative Examples 1 to 3. The straight line D2 is a straight line with  $y = 0.7$  (block deformation amount of 0.7%). In the present invention, the deformation amount may be more than 0.7%.

20 The baked block-shaped molded article of the present invention has a block deformation amount and a melt viscosity within a region surrounded by the straight line A, straight line B, straight line C1, straight line D1, and straight line E1. The region surrounded by the straight line A, straight line B, straight line C2, straight line D1, and straight line E2 is preferable. The region surrounded by the straight

25 line A, straight line B, straight line C3, straight line D1, and straight line E3 is more

preferable.

### Preferred Embodiments of the Invention

Hereafter, Examples and Comparative Examples will be shown to exemplify  
 5 the present invention.

The melt viscosity of tetrafluoroethylene polymer was measured at 380°C  
 with the use of a viscoelasticity measuring apparatus RDS-2 manufactured by  
 Rheometrics Inc.

### 10 EXAMPLE 1

A powder (average particle size: about 30  $\mu\text{m}$ ) of tetrafluoroethylene  
 /perfluoropropyl vinyl ether copolymer (melt viscosity at 380°C of the copolymer:  
 $6.00 \times 10^9$  poise) obtained by suspension polymerization was compression-molded at  
 25°C under a pressure of 200  $\text{kg}/\text{cm}^2$  for 120 minutes to give a preform as shown in  
 15 Fig. 1. The preform had a length L of about 100 cm, and a diameter D of about 42  
 cm. The diameter of a hole was about 15 cm. The load per unit area at the time of  
 baking the preform  $[(\text{weight of the preform (250 kg)}) \div (\text{outer surface area of the}$   
 $\text{preform excluding the two bottom surface areas (i.e. the area of the surface of the}$   
 $\text{preform brought into contact with the pipe at the baking time) (13,190 cm}^2)]$  was 19  
 20  $\text{g}/\text{cm}^2$ .

The preform was baked in the manner shown in Fig. 2. The outer diameter  
 of the cross-section of the two rolls was 15 cm. With respect to the stainless steel  
 pipe outside of the molded article, the outer diameter was 50 cm, and the thickness  
 was 1 cm. With respect to the stainless steel pipe inside of the molded article, the  
 25 outer diameter was 12 cm, and the thickness was 1 cm. The rotation speed of the



rolls was adjusted so that the rotation speed of the preform was 90 revolutions per hour. The baking was carried out, while rotating the preform at 90 revolutions per hour and keeping the preform at a temperature of 340 to 380°C for 50 hours. The baking gave a block-shaped molded article. The block-shaped molded article had a  
5 length of about 108 cm, a diameter of about 40 cm, and a diameter of the hole of about 14 cm.

The weight loss (block deformation amount) until a stable film or sheet could be cut from the block-shaped molded article was 0.8%.

The block-shaped molded article was skived to give a film having a  
10 thickness of 25  $\mu\text{m}$ . The film had no distortion, and no curls or wrinkles were generated.

## EXAMPLE 2

The same procedure as in Example 1 was repeated except that a  
15 tetrafluoroethylene-based polymer having a melt viscosity at 380°C of  $6.55 \times 10^9$  poise was used.

The weight loss (block deformation amount) until a stable film or sheet could be cut from the block-shaped molded article was 0.6%.

The block-shaped molded article was skived to give a film having a  
20 thickness of 25  $\mu\text{m}$ . The film had no distortion, and no curls or wrinkles were generated.

## EXAMPLE 3

The same procedure as in Example 1 was repeated except that a  
25 tetrafluoroethylene-based polymer having a melt viscosity at 380°C of  $1.32 \times 10^{10}$

poise was used.

The weight loss (block deformation amount) until a stable film or sheet could be cut from the block-shaped molded article was 0.16%.

5 The block-shaped molded article was skived to give a film having a thickness of 25  $\mu\text{m}$ . The film had no distortion, and no curls or wrinkles were generated.

#### COMPARATIVE EXAMPLE 1

10 The same procedure as in Example 1 was repeated except that baking (longitudinal baking) was carried out by means of a conventional method using a tetrafluoroethylene-based polymer having a melt viscosity at 380°C of  $6.55 \times 10^9$  poise. Namely, the preform was put into a furnace so that the rotation symmetry axis of the preform was in the gravitational direction, and the preform was heated at 340 to 380°C for 50 hours without moving the preform.

15 The load per unit area at the time of baking the preform ((weight of the preform (250 kg))  $\div$  (bottom surface area of the preform 1210  $\text{cm}^2$ )) was 207  $\text{g}/\text{cm}^2$ .

20 The weight loss (block deformation amount) until a stable film or sheet could be cut from the block-shaped molded article was 7.0%.

#### COMPARATIVE EXAMPLE 2

The same procedure as in Example 1 was repeated except that baking (longitudinal baking) was carried out by means of a conventional method using a tetrafluoroethylene-based polymer having a melt viscosity at 380°C of  $1.32 \times 10^{10}$  poise. Namely, the preform was put into a furnace so that the rotation symmetry

25

axis of the preform was in the gravitational direction, and the preform was heated at 340 to 380°C for 50 hours without moving the preform.

The weight loss (block deformation amount) until a stable film or sheet could be cut from the block-shaped molded article was 3.2%.

5

### COMPARATIVE EXAMPLE 3

The same procedure as in Example 1 was repeated except that baking (longitudinal baking) was carried out by means of a conventional method using a tetrafluoroethylene-based polymer having a melt viscosity at 380°C of  $2.50 \times 10^{10}$  poise. Namely, the preform was put into a furnace so that the rotation symmetry axis of the preform was in the gravitational direction, and the preform was heated at 340 to 380°C for 50 hours without moving the preform.

10

The weight loss (block deformation amount) until a stable film or sheet could be cut from the block-shaped molded article was 0.7%.

15

### EFFECTS OF THE INVENTION

According to the present invention, a material loss until a stable film or sheet can be cut from a block-shaped molded article is little.

## CLAIMS

1. (amended) A polytetrafluoroethylene block-shaped molded article having a melt viscosity and a block deformation amount contained within a  
5 polygonal region surrounded by a straight line A:  $x = 1.0 \times 10^9$  (melt viscosity of  $1.0 \times 10^9$  poise), a straight line B:  $x = 2.5 \times 10^{10}$  (melt viscosity of  $2.5 \times 10^{10}$  poise), a straight line C1:  $y = 7.0$  (block deformation amount of 7.0%), a straight line D1:  $y = 0$  (block deformation amount of 0%), and a straight line E1:  $y = -8.7 \log_{10}(x) + 91$  in a graph with an x-axis being a common logarithm of the melt viscosity (poise) at  
10 380°C of polytetrafluoroethylene and a y-axis being the block deformation amount (%) which is a weight loss until a stable film or sheet can be cut from the molded article,

wherein the polytetrafluoroethylene block-shaped molded article is obtained by compression-molding and baking a polytetrafluoroethylene powder obtained by  
15 suspension polymerization.

2. The molded article according to claim 1, wherein the melt viscosity at 380°C of the molded article is at most  $2 \times 10^{10}$  poise.

3. The molded article according to claim 1, wherein the block deformation amount is more than 0.7%.

20 4. The molded article according to claim 1, wherein the polytetrafluoroethylene block-shaped molded article is cylindrical and a height of the molded article is at least 800 mm.

5. (amended) A method of producing a polytetrafluoroethylene block-shaped molded article, comprising inserting a polytetrafluoroethylene preform  
25 obtained by compression-molding a polytetrafluoroethylene powder, into a pipe in a state in which a symmetry axis of the preform is horizontal; placing the pipe on two rolls spaced apart in a horizontal direction; and heating the preform to bake the preform while rotating the pipe and the preform by rotating at least one roll to transmit a rotation of the roll to the pipe, whereby giving the polytetrafluoroethylene  
30 block-shaped molded article.

6. The method according to claim 5, wherein a load per unit area at the

time of baking the preform is at most  $100 \text{ g/cm}^2$ .

7. The method according to claim 5, wherein an expansion of the height of the block-shaped molded article which is generated at the time of producing the polytetrafluoroethylene block-shaped molded article from the preform is at least 6%.

## ABSTRACT

A block-shaped baked molded article having little block deformation amount is obtained in order to reduce a loss of materials until a stable film or sheet  
5 can be cut from a block-shaped molded article. After a polytetrafluoroethylene powder is compression-molded to form a preform, the resultant preform is baked while being rotated, thereby to produce a polytetrafluoroethylene molded article.

1/4

Fig.1


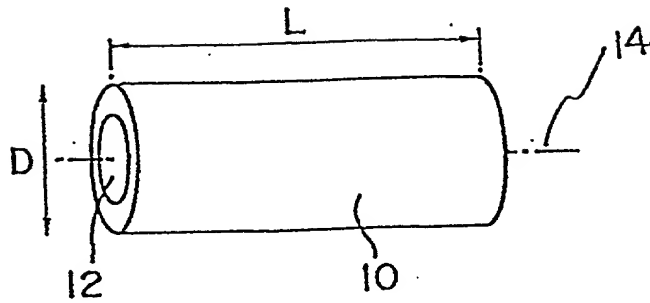


Fig.2

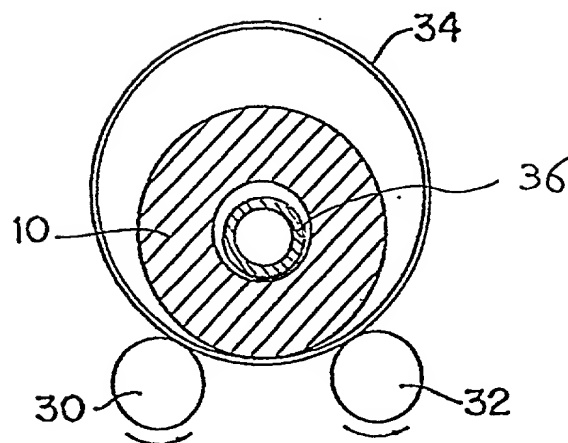

2/4

Fig.3

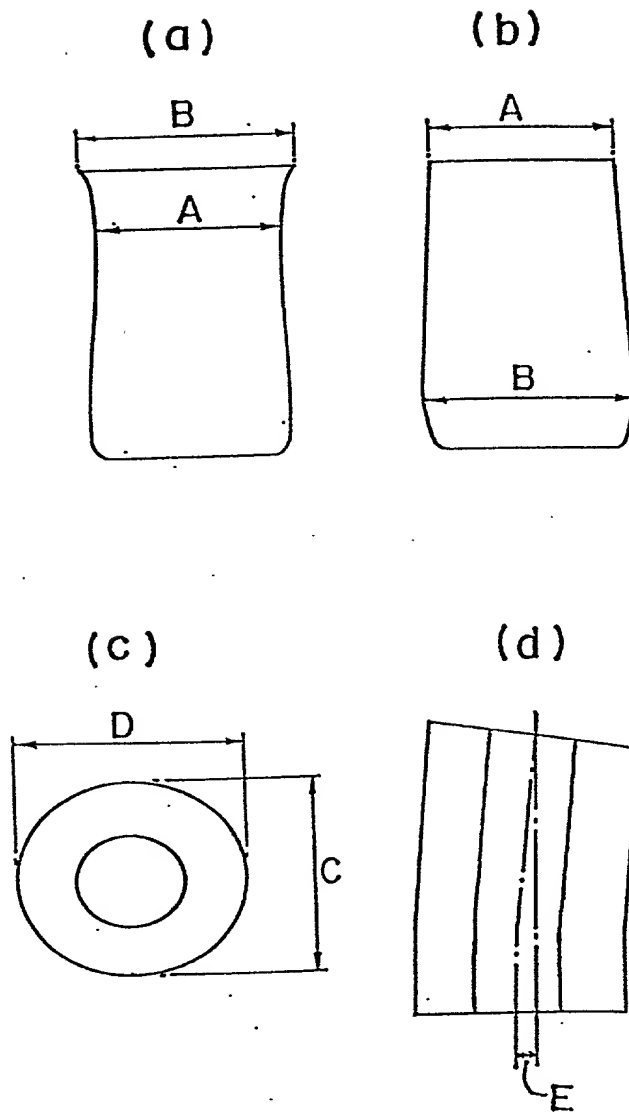




Fig.4


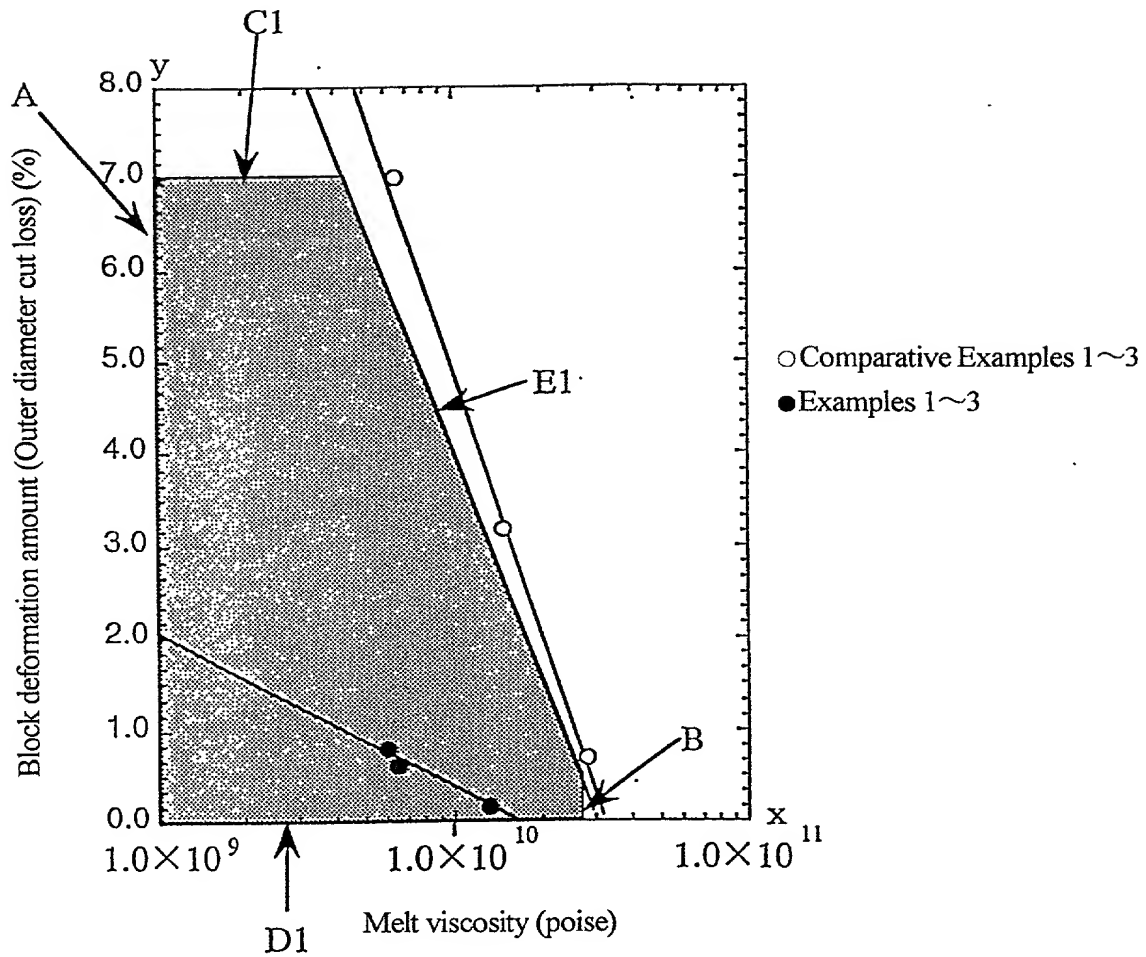


Fig.5

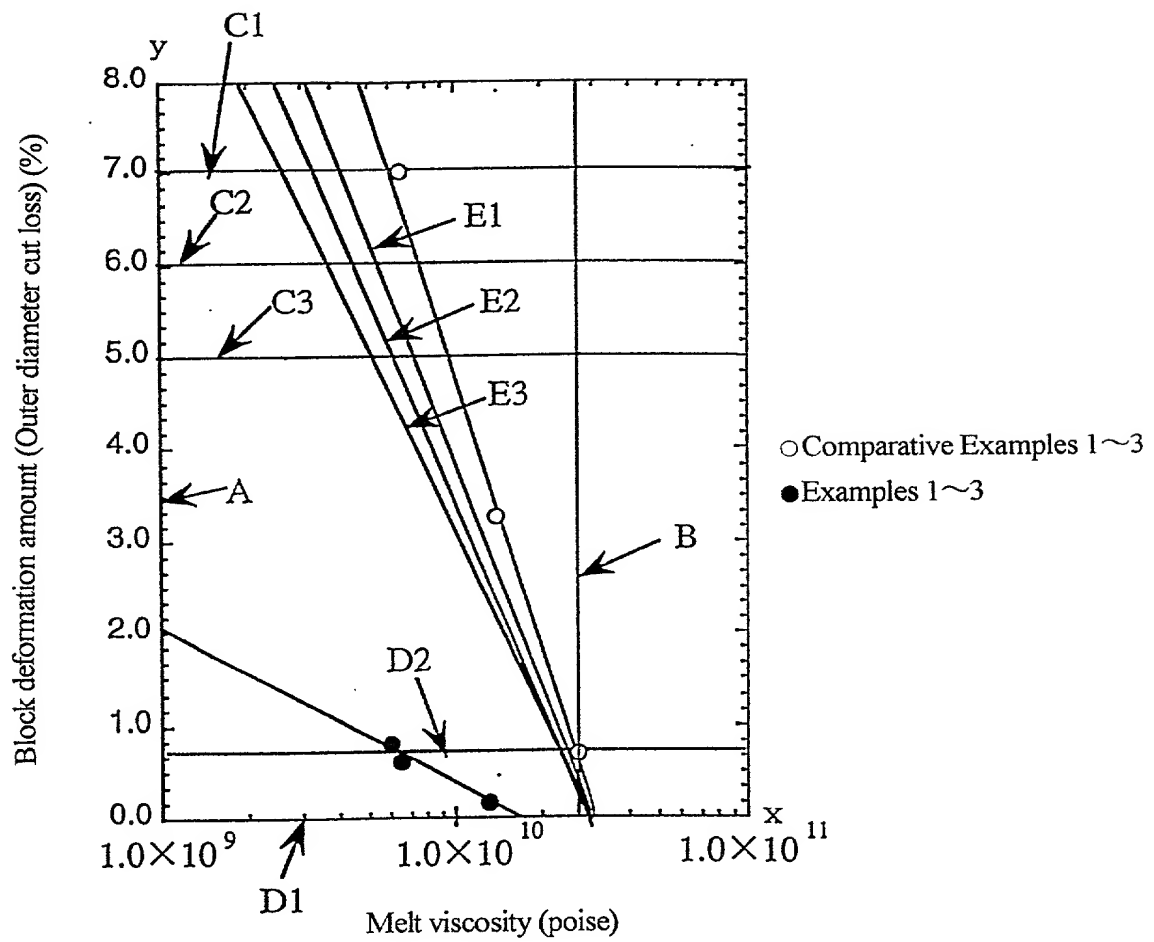

BIRCH, STEWART, KOLASCH & BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747  
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **POLYTETRAFLUOROETHYLENE BLOCK-SHAPED MOLDED ARTICLE AND METHOD OF PRODUCING THE SAME**

Insert Title:

Fill in Appropriate  
Information -  
For Use Without  
Specification  
Attached:

the specification of which is attached hereto. If not attached hereto,  
the specification was filed on \_\_\_\_\_ as  
United States Application Number \_\_\_\_\_;  
and amended on \_\_\_\_\_ (if applicable) and/or  
the specification was filed on September 7, 1999 as PCT  
International Application Number PCT/JP99/04832; and was  
amended under PCT Article 34 on September 8, 2000 (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Insert Priority  
Information:  
(if appropriate)

Prior Foreign Application(s)			Priority Claimed	
<u>264681/1998</u> (Number)	<u>Japan</u> (Country)	<u>Sep. 18, 1998</u> (Month/Day/Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month/Day/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional applications(s) listed below.

Insert Provisional  
Application(s):  
(if any)

(Application Number)	(Filing Date)
_____ (Application Number)	_____ (Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Insert Requested  
Information:  
(if appropriate)

Country	Application Number	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Insert Prior U.S.  
Application(s):  
(if any)

(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
_____ (Application Number)	_____ (Filing Date)	_____ (Status - patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart	(Reg. No. 21,066)	Terrell C. Birch	(Reg. No. 19,382)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	Donald J. Daley	(Reg. No. 34,313)
John W. Bailey	(Reg. No. 32,881)	John A. Castellano	(Reg. No. 35,094)
Gary D. Yacura	(Reg. No. 35,416)		

Send Correspondence to:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP** or Customer No. 2292  
P.O. Box 747 • Falls Church, Virginia 22040-0747  
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:  
YOU MUST  
COMPLETE  
THE  
FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First  
or Sole Inventor:  
Insert Name of  
Inventor  
Insert Date This  
Document is Signed

Insert Residence  
Insert Citizenship

Insert Post Office  
Address

Full Name of Second  
Inventor, if any:  
see above

Full Name of Third  
Inventor, if any:  
see above

Full Name of Fourth  
Inventor, if any:  
see above

GIVEN NAME/FAMILY NAME <b>Kazuo ISHIWARI</b>		INVENTOR'S SIGNATURE <i>Kazuo Ishiwari</i>	DATE* <i>Mar. 8, 2001</i>
Residence (City, State & Country) <b>Settsu-shi, Osaka, Japan JPX</b>		CITIZENSHIP <b>Japan</b>	
MAILING ADDRESS (Complete Street Address including City, State & Country) <b>c/o Yodogawa Works of DAIKIN INDUSTRIES, LTD., 1-1, Nishihitotsuya, Settsu-shi, Osaka 566-8585 Japan</b>			
GIVEN NAME/FAMILY NAME <b>Tatsuro UCHIDA</b>		INVENTOR'S SIGNATURE <i>TATSURO UCHIDA</i>	DATE* <i>Mar. 8, 2001</i>
Residence (City, State & Country) <b>Settsu-shi, Osaka, Japan JPX</b>		CITIZENSHIP <b>Japan</b>	
MAILING ADDRESS (Complete Street Address including City, State & Country) <b>c/o Yodogawa Works of DAIKIN INDUSTRIES, LTD., 1-1, Nishihitotsuya, Settsu-shi, Osaka 566-8585 Japan</b>			
GIVEN NAME/FAMILY NAME <b>Masahiko YAMADA</b>		INVENTOR'S SIGNATURE <i>Masahiko Yamada</i>	DATE* <i>Mar. 8, 2001</i>
Residence (City, State & Country) <b>Settsu-shi, Osaka, Japan JPX</b>		CITIZENSHIP <b>Japan</b>	
MAILING ADDRESS (Complete Street Address including City, State & Country) <b>c/o Yodogawa Works of DAIKIN INDUSTRIES, LTD., 1-1, Nishihitotsuya, Settsu-shi, Osaka 566-8585 Japan</b>			
GIVEN NAME/FAMILY NAME		INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
MAILING ADDRESS (Complete Street Address including City, State & Country)			